


# PRECISION THIN GAUGE STRIP



## STAINLESS STEEL, NICKEL & COBALT STRIP

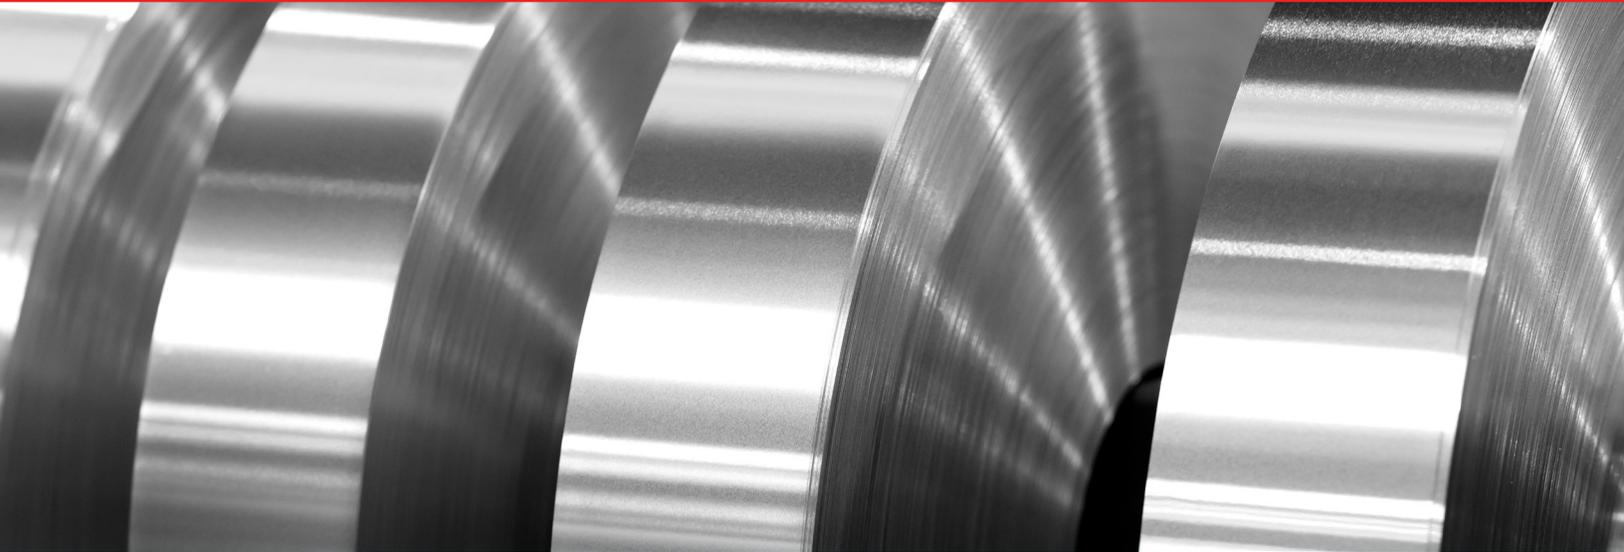

### STRIP CAPABILITIES

- AS9100D with ISO 9001:2015
- Extreme Precision Tolerances
- Fully Certified AMS and ASTM Specs
- DFARS Compliant Material



### INDUSTRIES SERVED

- Aerospace
- Power Generation
- Automotive
- Photo-Etching
- Springs
- Electronics
- Fasteners
- Washers
- Strapping
- Filters
- Gaskets
- Hose Clamps
- Appliances
- Refrigeration

### PRECISION REROLLED STRIP SOLUTIONS

United Performance Metals now offers precision thin gauge strip in stainless steel, nickel alloys, and cobalt to your exacting specifications. By leveraging our people, products, and FIRSTCUT+® Processing Services, our new rerolling mill is the latest example of how we are expanding to meet our customer's needs.

### PRECISION THIN GAUGE STRIP EQUIPMENT

Sendzimir Cold Reversing Mill, Strip Cleaning Line, Bright Annealing Furnace, Slitting Line



888.282.3292

[sales@upmet.com](mailto:sales@upmet.com)

[www.upmet.com](http://www.upmet.com)

# PRECISION THIN GAUGE STRIP

<b>STAINLESS STEEL</b>	301	302	304/ 304L	305	316/ 316L	321	347				
<b>NICKEL ALLOYS</b>	201	600	625	625 LCF	718	A286	X750	ALLOY X	C276	WASPALLOY	RENE® 41
<b>COBALT ALLOYS</b>	L605	188	CONI- CHROME								
<b>ALL TEMPERS</b>	1/8, 1/4, 1/2, 3/4, Full Hard, Spring Temper available in 301, 302 and 304 Can also be processed to customer specific property requirements										

<b>THICKNESS RANGE</b>	.0008" - .015" (0.005" Rene® 41)
<b>WIDTH RANGE</b>	.200" – 12.00" #3 Slit Edge 12.50" Mill Edge
<b>CERTIFICATIONS</b>	Full chemical and mechanical certification provided to ASTM and/or AMS specifications DFARS/Domestic available as needed
<b>BRIGHT ANNEALING</b>	Controlled hydrogen atmosphere annealing for a brighter finish
<b>SURFACE FINISHES</b>	1BA & TR (Temper Rolled), 2B
<b>SURFACE ROUGHNESS</b>	4 – 12 RA or as required
<b>SURFACE CLEANING</b>	Cleaning as thin as .0008"
<b>FLATNESS AS ROLLED</b>	3% of thickness. Tension leveling for thin gauges is available upon request
<b>CAMBER</b>	As narrow as 1/2" wide: 1/4" maximum in any 8 foot length Less than 1/2" wide: 1/2" maximum in any 8 foot length
<b>COIL ID</b>	6", 8", 16"
<b>LOT SIZE</b>	50 lbs. minimum for rolled items - 25 lbs. minimum for slit stock

Please contact us for additional grades and sizes at [sales@upmet.com](mailto:sales@upmet.com)

**QUALITY SOLUTIONS. TRUSTED PARTNERS.**